


PREMIUM BLACK LVT UNDERLAYMENT

SoundWise™ PP 5010 foam underlayment is specifically designed for both floating and glue down resilient and composite floors. PP 5010 has an excellent delta rating for sound control. With non-crosslinking technology, PP 5010 is guaranteed moisture resistant up to 85% RH. The low profile and excellent compression rate of PP 5010 protects floating floor locking systems from vertical deflection. PP 5010 sound abatement ratings exceeds building code regulations for high rise construction.

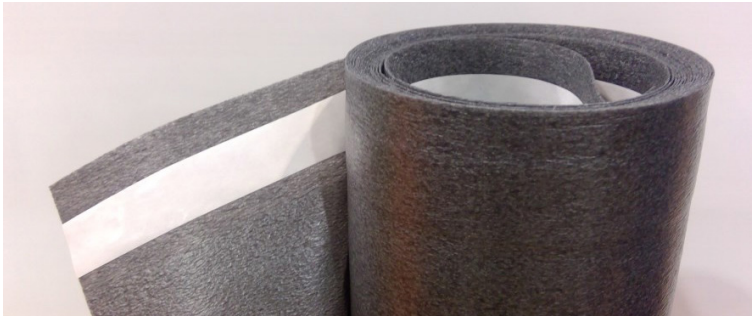

- APA approved interior subfloors

SOUND TEST:

IIC	STC	DELTA	FLOOR	SUBFLOOR
69	61	27	LVP	6" CONCRETE w/ Ceiling

PHYSICAL CHARACTERISTICS:

- Material = Polypropylene Foam (non-xlink)
- Density (lbs./cu ft) = 5.0
- Thickness (mm) = 1.0
- Compression Strength (psi@50%) = 20.2
- Moisture Vapor Emissions Rate = .000003389 (lbs/m²/24hrs)
- Joining System = LAPWISE™ Technology

DIMENSIONS AND PACKAGING:

- Roll Size = 100.1 sq ft
- Roll Dimensions = 42" x 28.6'
- Rolls Per Pallet = 160
- Pallets Per Truck = 26
- Rolls Per Truck = 4680

INSTALLATION INSTRUCTIONS:

1. Clean, sweep or vacuum subfloor of all debris.
2. Check subfloor. Should be clean, dry and level.
3. Roll out underlayment to length of room.
4. If below grade, extend up the wall 2".
5. Roll out second row, overlap LAPWISE™ seam 2".
6. Remove release liner and press LAPWISE™ seam together.

APPLICATION:

Approved for **Commercial** and **Residential** Flooring.



PRODUCT FEATURES:

- Sound Abatement
- Moisture Protection up to 85% RH
- LAPWISE™ seam sealing technology
- Recyclable
- MADE IN THE USA
- 20 Year Limited Warranty

APPROVED FOR USE UNDER:

- WPC, SPC, LVP and Rigid Core
- MLF products 3.2mm thick and greater
- Laminate
- Solid Hard Wood Floating Floors
- Engineered Wood Floating Floors
- Bamboo Floating Floors
- Double Glue Installations

APPROVED SUBSTRATES:

- Cured Concrete
- OSB

"Working with ExxonMobil and use of their performance polymers has been key to the successful development of this unique product."

Ron Wise – Owner, Wise Manufacturing



ExxonMobil

Vistamaxx™
Performance Polymers

SoundWise™ Underlayment for all your residential and commercial flooring needs.



WISE PRODUCTS, LLC

635 Old Hickory Blvd
Nashville, TN 37138

www.wiseflooringproducts.com

PH (615) 847-2919
Fax (615) 847-2425

Manufactured by:
WISE MANUFACTURING, INC
ISO-9001 / IATF - 16949 REGISTERED